



點序科技股份有限公司  
ASolid Technology Co., Ltd.

3-TH-042

## **Datasheet: SD Memory Card Controller AS2683S**

---

Version 01.04

**Document Control Center**

**2016/6/2**

**ASOLID TECHNOLOGY CO., LTD.**

7F.-1, No.83, Sec. 2, Gongdao 5th Rd., Hsinchu 300, Taiwan (R.O.C.)

Tel: +886-3-573-6032

Fax: +886-3-573-6300

## Contents

1. Foreword.....	3
2. Statement of Scope .....	4
3. General Description .....	5
3.1. Feature.....	5
3.2. AS2683S Function Block Diagram .....	7

ASOLID Confidential

## 1. Foreword

This document has been produced by ASolid Technology Co., Ltd., should the company modifies the contents of this specification, it will be re-released with an identifying change of release date and an increase in revision number as follows:

Revision mn.xy, where:

- mn the first two digit are incremented for major changes of substance, e.g., functional changes.
- xy the second two digits are incremented when minor changes have been incorporated into the specification, i.e., enhancements, corrections, updates, etc.

ASolid Confidential

## 2. Statement of Scope

This Data Book describes the main features and the applications of SD Memory Card Controller AS2683S. For more details, please contact [service.asolid@asolid-tek.com](mailto:service.asolid@asolid-tek.com) directly.

ASolid Confidential

### 3. General Description

SD Memory Card Controller AS2683S is the SD controller launched by ASolid Technology Co., Ltd., which utilizes UMC process technology. AS2683S is featured with higher performance and lower power consumption, and supports SD1.01, SD1.10 and SD2.02. The product is built in with single channel high speed flash interface with BCH error correction code, and supports all kinds of NAND type flash, including TLC, MLC and SLC.

#### 3.1. Feature

- Fully compatible with SD Card standard specification v1.01/v1.1/v2.02.
  - Support SPI mode.
  - Support Bus Speed Mode: Default Speed mode and High Speed mode.
  - Copyright Protection Mechanism-Complies with highest security of SDMI standard.
  - Support standard capacity SD memory card ( $\leq 2\text{GB}$ ).
  - Support SDHC capacity (4GB to 32GB).
  - Support SD command class 0, 2, 4, 5, 6, 7, 8 and 10.
  - Support password protection and built-in write protection features.
- SD card interface with programmable output drive capability
- Flash interface support:
  - Support up to two flash chip selection and 8-bit flash IO access
  - Support only 3.3V flash for SD card
  - 1.8V flash is supported if flash chips are powered independently
- Flash memory support:
  - Support ECC function to correct up to 24-bits data errors per 1K bytes data automatically
  - Support SLC/MLC/TLC NAND type flash
  - Support flash with 2KB/4KB/8KB/16KB page architecture
  - Support four-plane operation
  - Support Toggle Mode flash
  - Support ONFI2.3/ONFI2.2/ONFI2.1/ONFI2.0 flash
- Low power consumption
- Enhanced ESD design
- Non-Direct remap architecture
- Manufacturing utility ready

- Support die and LGA46 package

ASolid Confidential

### 3.2. AS2683S Function Block Diagram

The following diagram is the internal block diagram of AS2683S.

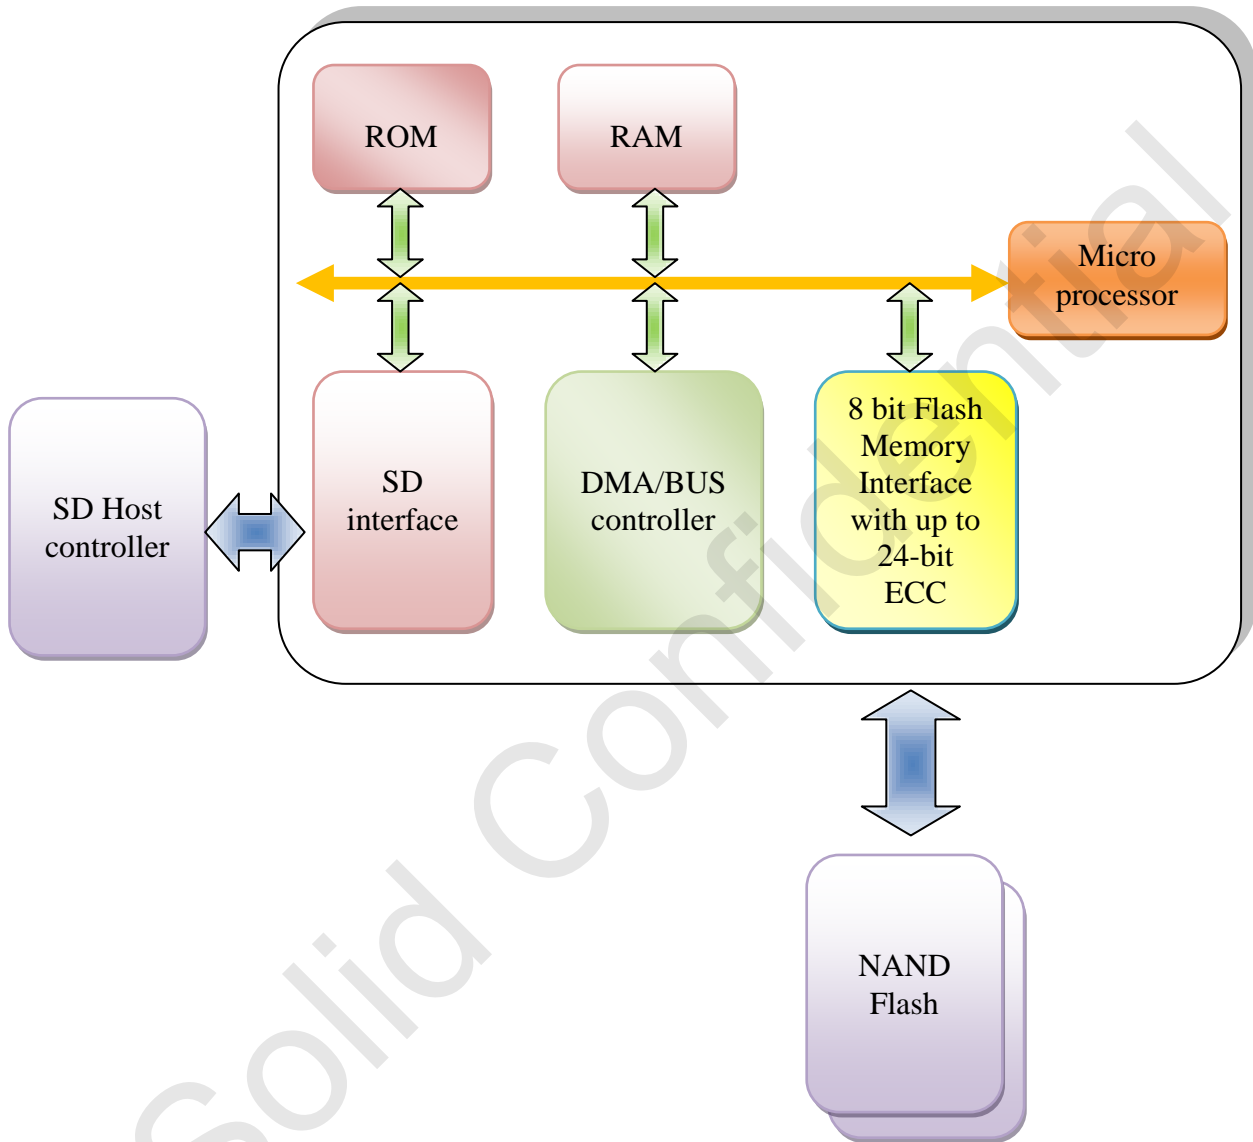


Figure 3-1 AS2683S Function Block Diagram